
TSUN Micro Inverter



TSOL-M800/M1600

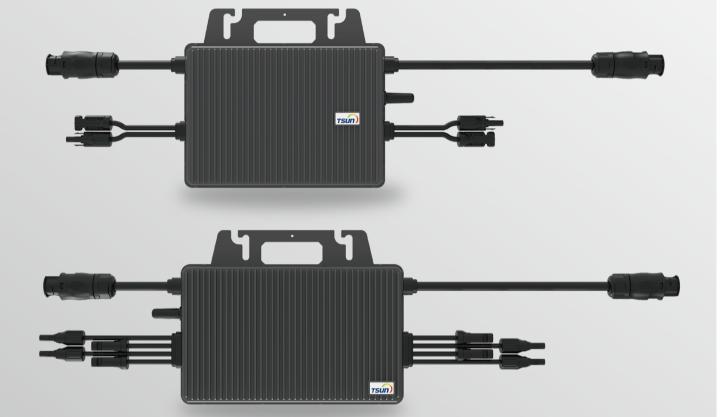

Maximized Efficiency

- Individual optimization, separate dedicated MPPT for each panel.
- New topology design, max. efficiency up to 96.7%.

Flexibility

- Plug & play installation. Easy to install.
- Multi-channel MPPT for complex installation environments with higher cost performance

Safety

- Max. DC voltage 60V. No threat for high DC voltage.
- Integrated LoM protection function. Ensure the safety of power grid.

Reliability

- Die casting design and glue filling technology. Better thermal dissipation.
- Standard 12 years warranty, Quality guaranteed.



TSUNESS Co., Ltd

E-mail: sales@tsun-ess.com Web: www.tsun-ess.com Tel: +86-512-6618 6028

Add: Building D2, No. 555, Chuangye Road, Jiashan, Zhejiang Province, China

Technical Data

| Model | TSOL-M800 | TSOL-M1600 |
|--|---------------------|------------|
| Input(DC) | | |
| Recommended Input Power [W] | 2*280-440 | 4*300-470 |
| MPPT Voltage Range [V] | 33-48 | 36-48 |
| Operating Voltage Range [V] | 16-60 | |
| Max. Input Voltage [V] | 60 | |
| Max. Input Current [A] | 11.5 | |
| Max. Input Short Circuit Current[A] | 15 | |
| Output [AC] | | |
| Max. Continous Output Power [W] | 700 | 1500 |
| Nominal Output Current [A] | 3.04 | 6.52 |
| Max. Output Current [A] | 3.19 | 6.82 |
| Nominal Output Voltage [V] * | 220/230/240, L/N/PE | |
| Nominal Frequency [Hz] * | 50/60 | |
| Power Factor | >0.99 | |
| Output Current Harmonic Distortion | | <3% |
| Max. Units Per Branch | 7 | 3 |
| Efficiency | | |
| Peak Conversion Efficiency | 96.6% | |
| CEC Weighted Efficiency | 96.5% | |
| Nominal MPPT Efficiency | 99.9% | |
| EU Efficiency | 96.3% | |
| Night Time Power Consumption [mW] | | <50 |
| Mechanical Data | | |
| Dimensions (WxHxD) [mm] | 250×170×28 | 280x176x33 |
| Weight [kg] | 3 | 3.75 |
| Type of Enclosure | IP67 | |
| Cooling | Natural Convection | |
| Environmental Data | | |
| Operating Ambient Temperature Range [¿] | -40°C to 65°C | |
| Operating Internal Temperature Range [¿] | -40°C to 85°C | |
| Relative Humidity | 0-100 % condensing | |
| Max. Operating Altitude Without Derating [M] | 2000 | |
| Monitor | 2.4G RF | |

 $[\]ensuremath{\eth}$ The AC voltage and frequency range may vary depending on specific country grid.

Diagram

